

Mayor
John W. Minto
City Council
Ronn Hall
Laura Koval
Rob McNelis
Dustin Trotter

February 12, 2026

To Prospective Bidders:

**CITYWIDE PAVEMENT REPAIR AND REHABILITATION PROGRAM PHASE 2 2025
CIP 2025-05**

ADDENDUM NO. 1

This Addendum No. 1 (3 pages in total, including this cover page) forms an essential part of the contract documents by revising the following:

1A CONTRACT DOCUMENTS

No changes.

1B SPECIFICATIONS

4-4

Testing

Add the following:

Testing related to slurry seal work is not required.

302-5.2.2

Asphalt Concrete Patching

Add the following:

The Contractor may perform 2 ½" and 4" asphalt patching on the same day at the same time. Asphalt class/type for each thickness of asphalt patching shall conform to Section 203-6.4.1. Thickness of each asphalt class/type shall conform to the minimum thickness as listed in Section 302-5.5.

404-1

General

Delete the 5th paragraph and replace with the following:

Edge grinds and header cuts on Cottonwood Avenue may be completed at the same time as asphalt patching is performed.

1C DRAWINGS/EXHIBITS

Replace Exhibit M with the attached **Exhibit M – Addendum No. 1**


Add **Exhibit X – Addendum No. 1** to the Contract Exhibits.

1D RFI RESPONSES

No changes.



Toby M. Espinola, P.E.
Senior Civil Engineer

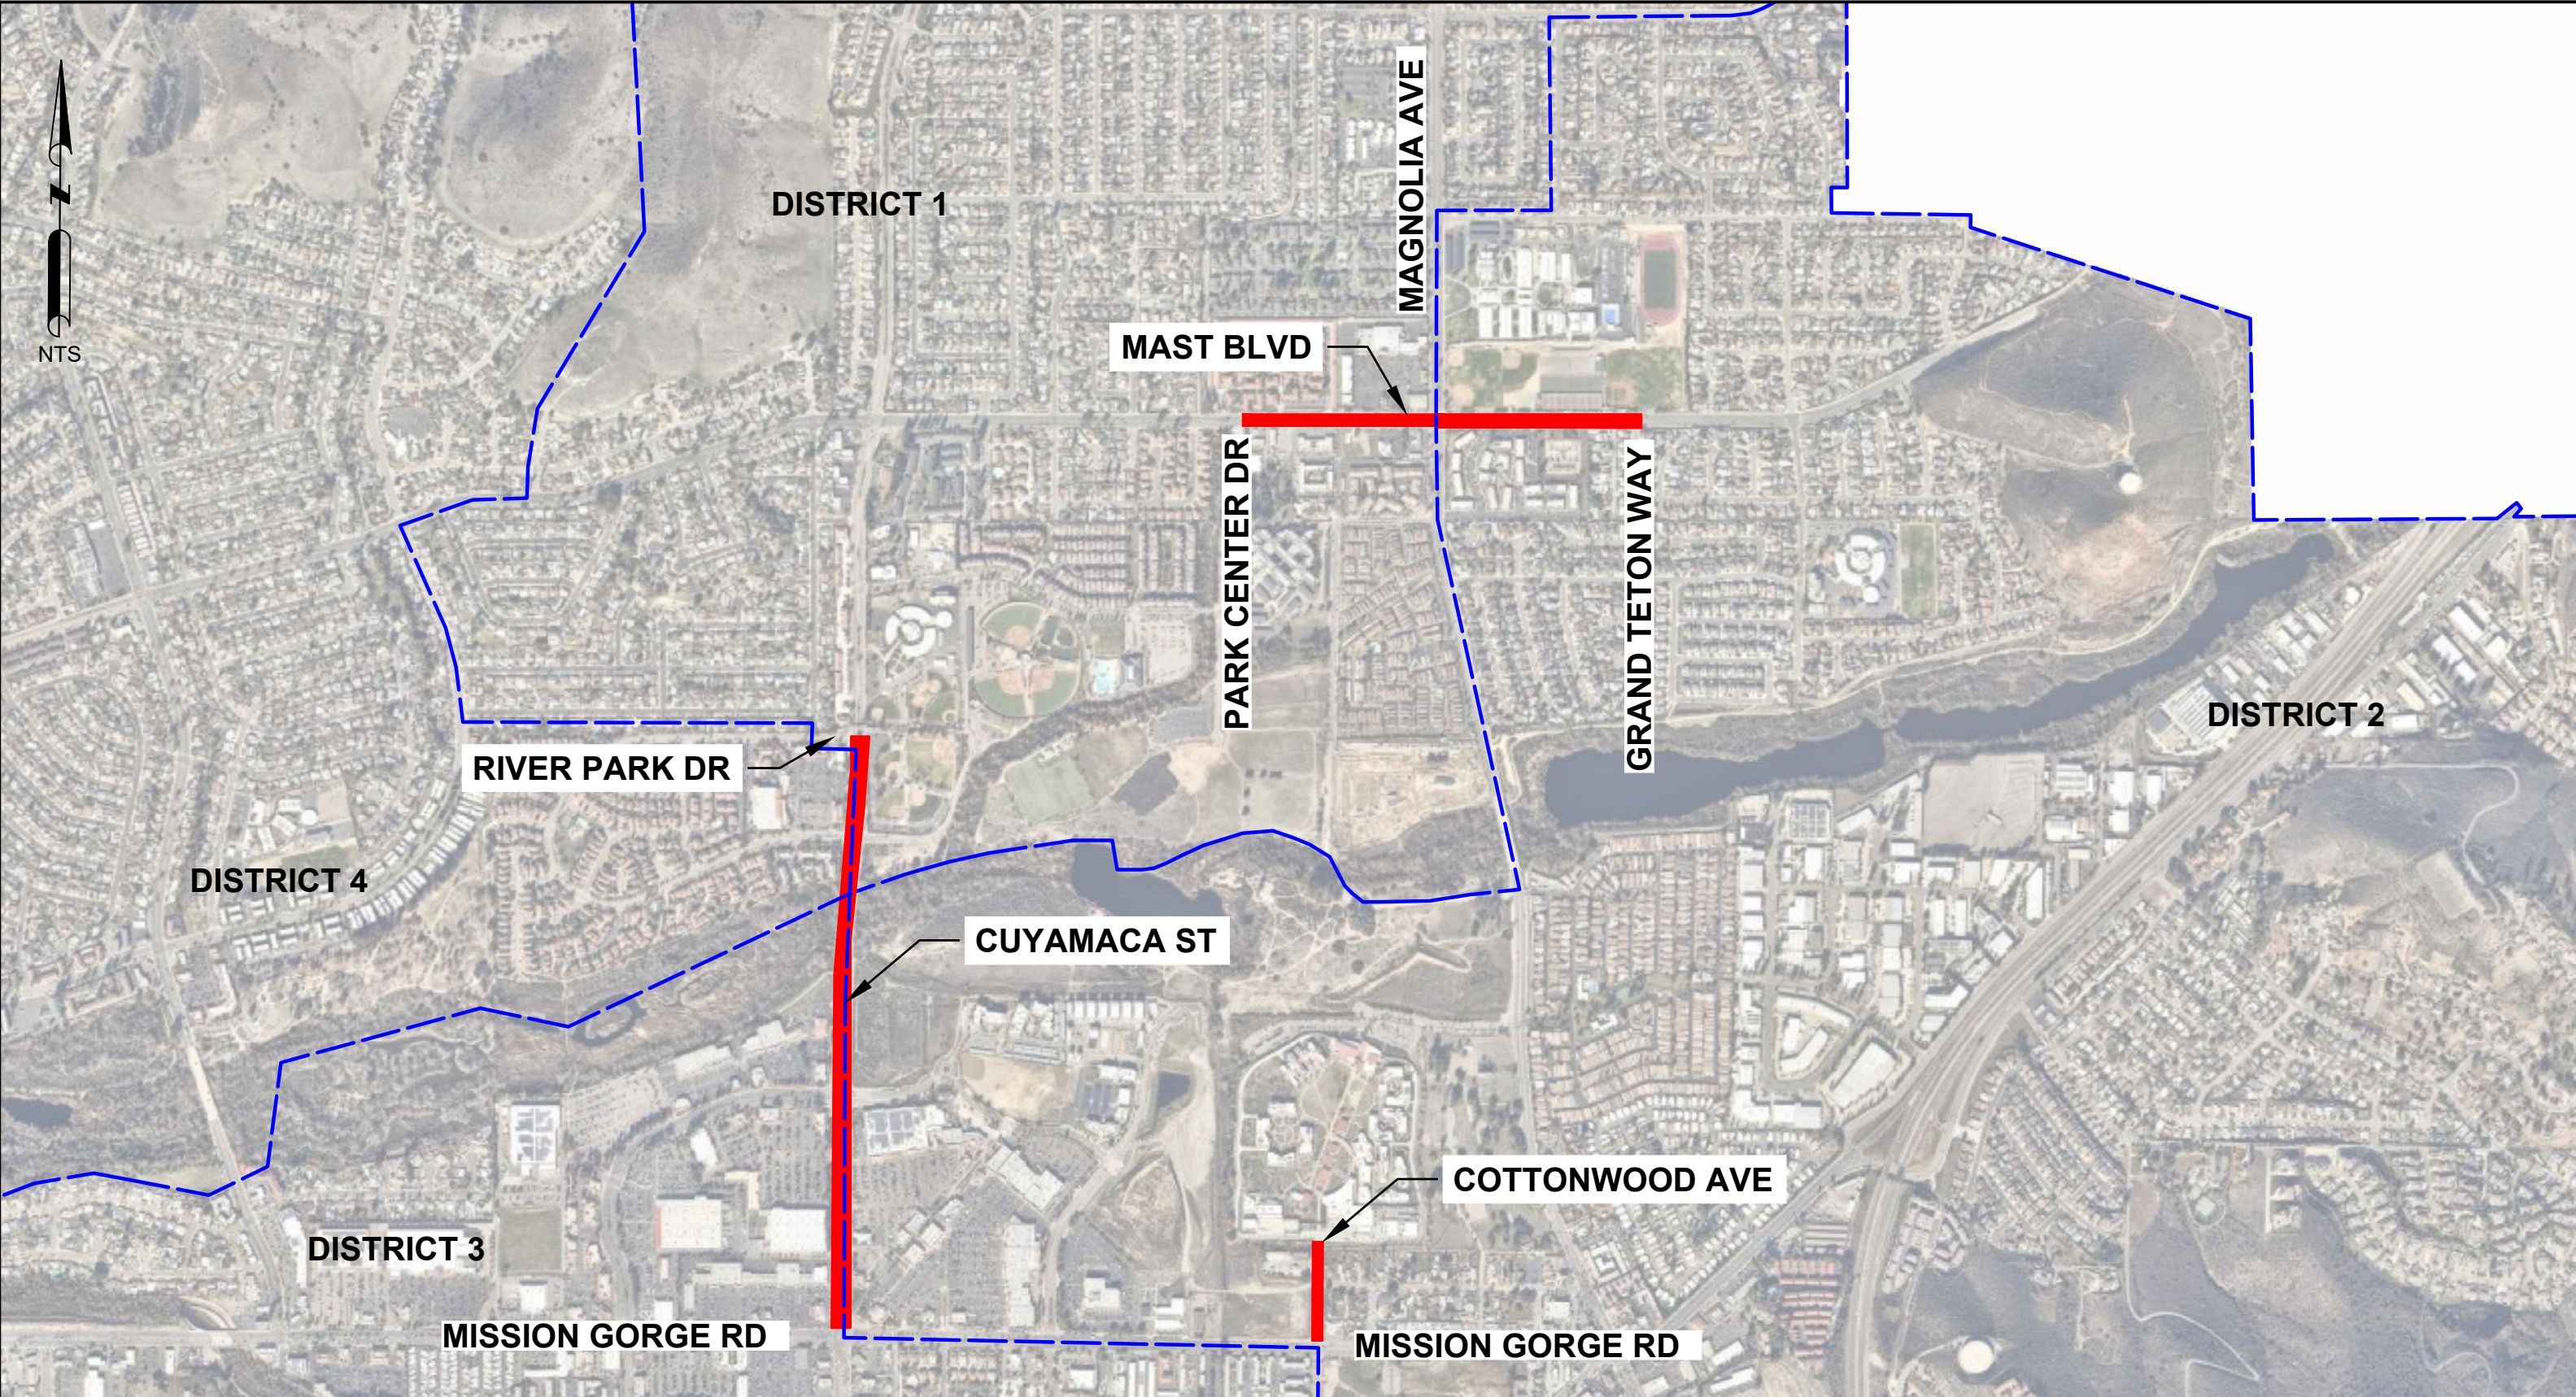

Crack Seal Limits**EXHIBIT X - ADDENDUM NO. 1****Citywide Pavement Repair and Rehabilitation Phase 2 2025****CIP 2025-05**

Street Name	From	To	Limits of Crack Fill
Cottonwood Ave	Mission Gorge Rd	End	4' From Edge of Asphalt
Cuyamaca St	Mission Gorge Rd	River Park Dr	Gutter to Gutter
Mast Blvd	Park Center Dr	Grand Teton Wy	Gutter to Gutter